



PO/GB2004/004991



INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 13 JAN 2005

WIPO


PC

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

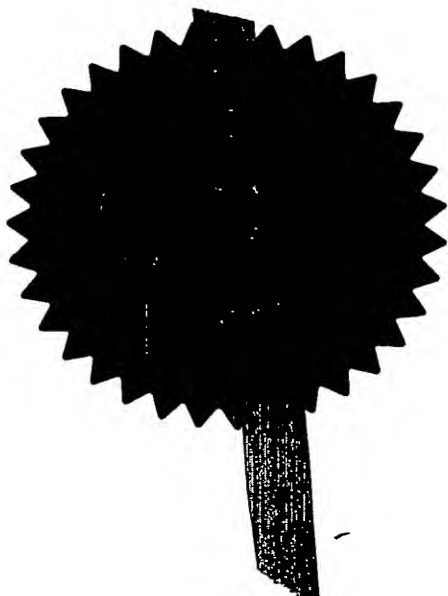

Signed

*Stephen Hordley*

Dated

22 December 2004



**GB 0327653.2**

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of:

**EURO PACKAGING LTD,  
Unit M,  
Waterloo Road,  
Yardley,  
BIRMINGHAM,  
West Midlands,  
B25 8UH,  
United Kingdom**

**Incorporated in the United Kingdom,**

**[ADP No. 08906265001]**

# The Patent Office

28NOV03 E855680-2 001038  
P01/7700 0.00-0327653.2

1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE  
28 NOV 2003  
NEWPORT

The Patent Office  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference DC.P304836GB

2. Patent application number  
(The Patent Office will fill in this part)

0327653.2

28 NOV 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

EPS (LLC)  
118 Amington Road  
Yardley  
Birmingham  
West Midlands  
B25 8JZ  
United Kingdom

Patents ADP number (if you know it)

87 329 01 001

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Sling-Roll Bag

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (if you know it)

1776001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES


**Patents Form 1/77**


9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form /

Description 10

Claim(s) /

Abstract / 

Drawing (s) 8 



10. If you are also filing any of the following, state how many against each item.

Priority documents /

Translations of priority documents /

Statement of inventorship and right to grant of a patent (Patents Form 7/77) /

Request for preliminary examination and search (Patents Form 9/77) /

Request for substantive examination (Patents Form 10/77) /

Any other documents /  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature  Date 26/11/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Dave Croston

0121 245 3900

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

P304836GB

**Sling-Roll Bag**

The invention relates to plastic bag dispensers and in particular to preformed bags supplied in a roll.

Bags of the kind described are used frequently in shops and supermarkets for retaining loose grocery items, for example fruit and vegetables. Typically, the dispenser will retain a roll of bags with perforations therebetween allowing the user to remove one bag at a time from the dispenser. The removal of the bag will facilitate the opening of the mouth of the bag.

However, there are problems associated with this form of bag dispenser. In particular, the dispenser will frequently deliver more than one bag to the user creating unnecessary expense for the shop proprietor. Furthermore, it may be that the bag can be removed from the dispenser without the mouth of the bag having been opened.

It is an object of the invention to provide an improved bag dispenser and roll of bags therefor.

According to the first aspect of the invention there is provided a bag dispenser having a sling for supporting a roll of pre-formed bags.

Preferably, the sling is defined by a sheet of flexible sheet material, supported at either end by two support members.

Alternatively, the sling may be defined by a sheet of flexible sheet material, supported by a single support member.

The flexible nature of the sheet material which forms the sling allows the sling to make contact with as much of the circumferential profile of the roll as possible thereby maximising the friction generated between the roll and the sling. This friction provides a

reaction against the force of removing a bag from the roll, as will be described further below.

Advantageously, this arrangement provides the consumer with a repeatable delivery of single, open bags and minimises the cost of wasted bags realised by the proprietor of a shop using the dispenser. This is achieved by minimising the likelihood of more than one bag being delivered to the consumer at a time.

In a preferred form of the alternative embodiment of the sling, the sling has a slit which allows passage of a pre-formed bag from a roll of pre-formed bags.

Preferably, the sling is retained by a first support member at first end and a second support member at a second end, the first and second support members being in fixed relation.

In a further alternative embodiment the first and second support members are in substantially the same horizontal plane.

In a preferred form of the further alternative embodiment a sling tension member is provided so as to form a neck in the profile of the sling.

Preferably, the second support member is arranged such that in use it is vertically above and horizontally displaced from the first support member.

Advantageously this sling arrangement allows the position of the bag in the sling to be optimised as the roll reduces in diameter by virtue of removal of bags therefrom.

Preferably, the sling has a length of between 175% and 225% of the distance between the first support member and the second support member, most preferably 200%.

Preferably, the dispenser includes a separator which in use facilitates the separation of a bag from the roll of preformed bags.

Preferably, the separator has a tip arranged in proximity to and substantially in the same horizontal plane as the first support member.

Advantageously, this arrangement of separator improves the repeatability of the user removing a single bag from the roll of bags which reduces the number of wasted bags. Furthermore, this feature of the invention also facilitates the opening of the mouth of the bag on removal of the bag from the roll.

Preferably, the separator is arranged in line with a midpoint of the support member.

Preferably, the first support member is arranged between the separator and the second support member.

Preferably the sling is formed from a mesh material, preferably a plastic coated fibreglass mesh material.

Advantageously, this feature of the invention generates a level of friction between the sling and the roll of bags which provides a level of resistance against which the user acts in removing a bag from the roll of bags by use of the separator.

Preferably the tip of the separator is coated in a high-friction material, most preferably a plastic coated fibreglass mesh material.

Advantageously, this feature of the invention generates friction between the bag being removed from the roll of bags and the separator further improving the repeatability of removing a single, open bag from the roll of bags.

According to a second aspect of the present invention there is provided a roll of pre-formed bags, the roll being formed from a flat folded tube, each pre-formed bag having a longitudinally arranged central portion and two longitudinally arranged exterior portions,

one arranged on either side of the central portion, the central portion being of two ply cross-section and each of the exterior portions being of an at least 4 ply cross-section.

Advantageously, this arrangement of roll provides a central portion of limited thickness, ie only 2 ply, for interaction with the separator. Since the separator has only a 2 ply thickness of plastics material to penetrate, this arrangement of roll offers improved repeatability of single bag removal.

Preferably, the exterior portions have an 8 ply cross-section.

Preferably, the central portion defines a transversely arranged central slit, each of the exterior portions defining a transversely arranged perforation which is substantially in line with the central slit.

Preferably the pre-formed bag has a base seal arranged in close proximity to the central slit.

Advantageously, this feature minimises the wasted plastics material between the base of one bag and the mouth opening of the next bag.

Preferably, the base seal runs substantially parallel to the central slit and perforations.

Preferably, the roll of pre-formed bags includes a cylindrical core of substantially the same width as the preformed bag.

In prior art rolls the core has typically protruded beyond the outer profile of the rolled bags in order to allow for the mounting of the core to a prior art dispenser. This form of protruding core is no longer necessary in the present invention since the core is not used to mount the roll of bags to the dispenser.



Advantageously, this arrangement of cylindrical base reduces the quantity of plastics material required to manufacture the base and thereby reduces the cost of manufacture of the roll of pre-formed bags.

According to a third aspect of the invention there is provided a method of making a roll of bags including the steps of

forming a continuous tube from a plastics material,

folding the tube so as to form two longitudinally arranged gusset portions,

folding each gusset portion so as to form a longitudinally arranged central portion and two longitudinally arranged exterior portions, one arranged on either side of the central portion, the central portion being of two ply cross-section and each of the exterior portions being of an at least 8 ply cross-section,

further including the steps of transversely sealing the continuous tube at a pre-determined interval so as to form a base seal,

transversely perforating the exterior portions in close proximity to the base seal,

forming a slit in the central portion which is substantially collinear with the perforations, and

rolling the continuous tube into a roll of bags.

The invention will now be described by way of non-limiting example with reference to the accompanying drawings, in which:

Fig.1 is a side view of a first embodiment of the dispenser and roll of bags according to the present invention showing hidden detail, and

Fig.2 is an end view of the dispenser and roll of bags of Fig.1 showing hidden detail.

Fig.3 is a perspective part view of an end of the roll of bags of Fig.1,

Fig.4 is a cross-section view of the roll of bags of Fig.1 in a first stage of production,

Fig.5 is a cross-section view of the roll of bags of Fig.1 in a second stage of production,

Fig.6 is a plan view of a bag forming part of the roll of bags of Fig.1,

Fig.7 is a perspective view of the bag of Fig.6 shown in its opened state,

Fig.8 is a partial end view of second embodiment of the dispenser and roll bag according to the present invention showing hidden detail,

Fig.9 is a side partial view of the dispenser and roll of bags of Fig.10 showing hidden detail,

Fig.10 is a partial end view of third embodiment of the dispenser and roll bag according to the present invention showing hidden detail,

Fig.11 is a partial end view of fourth embodiment of the dispenser and roll bag according to the present invention showing hidden detail.

Figs.1 and 2 show a bag dispenser 10 including a dispenser body 11 and roll of bags 50. The body 11 has a base 12 and two side walls 14a and 14b. A separator plate 16 is arranged to the front of the dispenser and a cross-brace 18 is arranged to the rear. The base 12, separator plate 16 and cross brace 18 separate the side walls 14a, 14b by a distance X.

The walls 14a, b each comprise a lower part 19 to which opposite ends of the base 12 are attached. The walls 14a, b also each have a protruding support arm 24a, b extending from an upper side of the lower part 19. The cross brace 18 extends between the side walls 14a, 14b between the free ends of arms 24a, b.

A first support member 20 is arranged between the side walls 14a, b towards the front of the side walls 14a, 14b at the transition between the lower part 19 and the support arms 24a, b as shown in Fig.1. A second support member 22 is arranged between the sidewalls 14a, b to the rear of the dispenser at a point on the support arms 24a, b just inbound of the cross brace 18.

The first and second support members 20, 22 are horizontally spaced apart through a distance Y, and vertically spaced apart through a distance Z. The first support member 20 is vertically displaced from the base 12 by a distance A.

The separator plate 16 is arranged at an angle  $\alpha$  to the vertical and defines a substantially rectangular lower portion 26 and a tapered upper portion 28 which forms a separator 30. The separator 30 is in substantially the same horizontal plane as, and in proximity to the first support member 20, although the tip of the separator 30 protrudes slightly above the first support member 20.

Suspended between the first and second support members 20, 22 is a sling 32. The sling 32 has a width substantially the same as the width X between the side walls 14a, 14b. A loop 34 is formed at a first end 36 of the sling 32 for receiving the first support member 20. Likewise, a loop 34 is formed at a second end 38 of the sling 32 for receiving the second support member 22.

The sling 32 is formed from a mesh material, and preferably from a plastic-coated fibre glass mesh material. However, in alternative embodiments it is conceivable that the sling be formed from a number of alternative materials, for example a series of articulated solid slats, chain mail or a unitary plastics material or fabric material.

The sling 32 is arranged between the first support member 20 and second support member 22 so as to be capable of supporting a roll of pre-formed bags 50. It will be appreciated that dimensions A, X and Y may be selected so as to receive a roll 50 of any diameter and width.

In Figs. 8 and 9 part of the body of the dispenser is not shown for clarity and components common with the first embodiment (Figs. 1 and 2) are renumbered 100 greater. The dispenser 110 has a single support member 190 on which the sling 132 is retained. The sling 132 supports a roll of bags 50. The sling 132 has a slit 176 through which an unrolled end of the roll of bags 50 protrudes. The relative arrangement of the separator 130 (not shown for clarity) and the slit 176 is identical to the relative arrangement of the separator 30 and the first support member 20 of the first embodiment.

In Figs. 10 and 11 part of the body of the dispenser is not shown for clarity and components common with the first embodiment (Figs. 1 and 2) are renumbered 200 greater for the third embodiment (Fig.10) and 300 greater for the fourth embodiment (Fig.11).

In Fig.10 the dispenser 210 has first and second support members 220, 222 that are spaced apart in substantially the same horizontal plane. A sling 232 is supported by the support members 220, 222 in a similar manner to that employed in the first embodiment.

First and second sling tension members 278, 279 are arranged so as to introduce a neck 280 to the profile of the sling 232. This necking feature further increases the friction generated between the roll of bags and the sling.

A dispenser 310 is shown in Fig.11 which is similar to dispenser 210 depicted in Fig.10 but with the addition of the sling tensioner 382. Sling tensioner 382 includes a base 384 fixedly attached to the body of the dispenser 310 (not shown for clarity), on which is mounted a compression spring 386. The other end of spring 386 acts on second sling tension member 279 which is displaceable in substantially the same line of action as the spring 386.

The removal of individual bags from the roll of bags 350 reduces the weight of the roll. As a result the force acting on the spring 386 reduces causing the second sling tension member 379 to displace in direction 388. In this manner contact between the roll of bags 350 and the sling 332 is optimised during the life of the roll of bags thereby maximising the level of friction generated. This displacement of the second sling tension member 379 has the additional benefit of moving the centre of mass of the roll of bags 350 towards the separator (not shown for clarity), further increasing the level of friction generated between the roll 350 and the sling 332. It will be noted that the spring may be replaced with a suitable elastomeric body or other resilient body.

In an alternative embodiment (not shown), the first and second sling tensioners may be replaced with a resilient loop, for example a rubber band, which extends around the outside of the sling so as to effect the above described necking.

It will be appreciated that in alternative embodiments one or, where appropriate, both of the support members may have an associated sling tensioner. Likewise the support members may be fixed and one, two, or more sling tension members, each with an associated sling tensioner, may be employed.

Furthermore, any of the embodiments described herein may include a sling with a slit for delivery of a bag from the roll of bags.

The roll of bags 50 (one end of which is shown in Fig. 3) is formed from a continuous flat-folded plastics tube 52. The plastics tube 52 is initially gusseted so as to form a star shape 54 having two gusset folds 56, as shown in Fig.4 in known manner. The tube is then folded so that opposite longitudinal edges of the tube are folded inwardly toward the longitudinal centreline of the tube, thereby forming two longitudinal fold lines parallel with the longitudinal edges of the tube. The longitudinal fold lines are each arranged closer to the respective adjacent longitudinal edge than to the longitudinal centreline. In that way, when each edge is folded inwardly, it does not reach the centreline. That folding arrangement defines a central portion 60 having a 2 ply thickness and two exterior portions 62a and 62b being of 8 ply thickness. It is conceivable within the scope of the invention that the exterior portions could have additional folds such that they may have a thickness greater than 8-ply, for example 16 ply but the central portion 60 will remain 2 ply only.

With reference to Fig.6, the flat-folded tube has a plurality of transversely arranged base seals 64. In proximity to the base seal 64, and substantially parallel to it, are perforations 66 in the exterior portions 62a and 62b. Substantially collinear with the perforations 66 is a central slit 68 formed through the central portion 60.

In such a manner the flat folded tube 52 forms a series of individual bags 70. By tearing the perforations 66, and slit 68, a bag 70 is removed from the roll of bags 50. The base seal 64 acts as a base 72 to the bag, and the perforations 66, 68 define a mouth 74 to the bag 70, as shown in Fig.7.

In use, bag 70 is dispensed in the following manner. The user pulls the bag over the separator 30, gripping the bag at the mouth 74. The roll of bags 50 is caused to rotate in the sling 32. The bag 70 will continue to slide, under the action of the user, over the separator 30 until such time as the separator 30 comes into contact with the central slit 68, at which point the separator 30 will penetrate the slit 68 retarding the progress of the 2 ply central portion. With continued manual pulling by the user, the outermost edges of the multiple ply exterior portions 62 will continue in the direction of pulling, causing the mouth 74 of the bag to begin to open as the gussets and folds of the formed bag begin to

unravel. The perforations break, in sequence, around the edges of the folded starting from the centre of the lower face 73 (see Fig.3). Once enough of the perforations have been broken the strength of the remaining perforations is not sufficient to resist the bag from being detached in its entirety from the next bag. As a result the bag becomes singularly detached from the roll of bags.

It will be appreciated that the friction generated between the sling 32 and the roll of bags 50 causes the bag 70 which is being removed by the user to be pulled taut over the separator 30. This mechanism ensures penetration of the central slit 68 by the separator 30. This in turn improves the repeatability of removal of a bag 70 from the roll of bags 50.

However, even where the separator 30 does not penetrate the central slit 68 the friction generated between the separator 30 and the bag being removed is sufficient to cause the slit 68 and perforations 66 to tear. Furthermore, under this action the bag is still delivered part-opened since the separator acts on the lower face 73 of the bag whilst the upper face 75 is pulled by the user causing the mouth of the bag to open.

Furthermore, the arrangement of the second support member 22 vertically above the first support member 20 ensures that as the roll of bags 50 depletes in size, the angle  $\beta$  (Fig.2) remains substantially constant so as to ensure a sufficient level of friction is generated between the sling 32 and the roll of bags 50.

It is conceivable within the scope of the invention that the dispenser is capable of dispensing a roll of bags of alternative formation, for example, the roll of bags need not have the C-folded gusset feature of the roll defined herein.

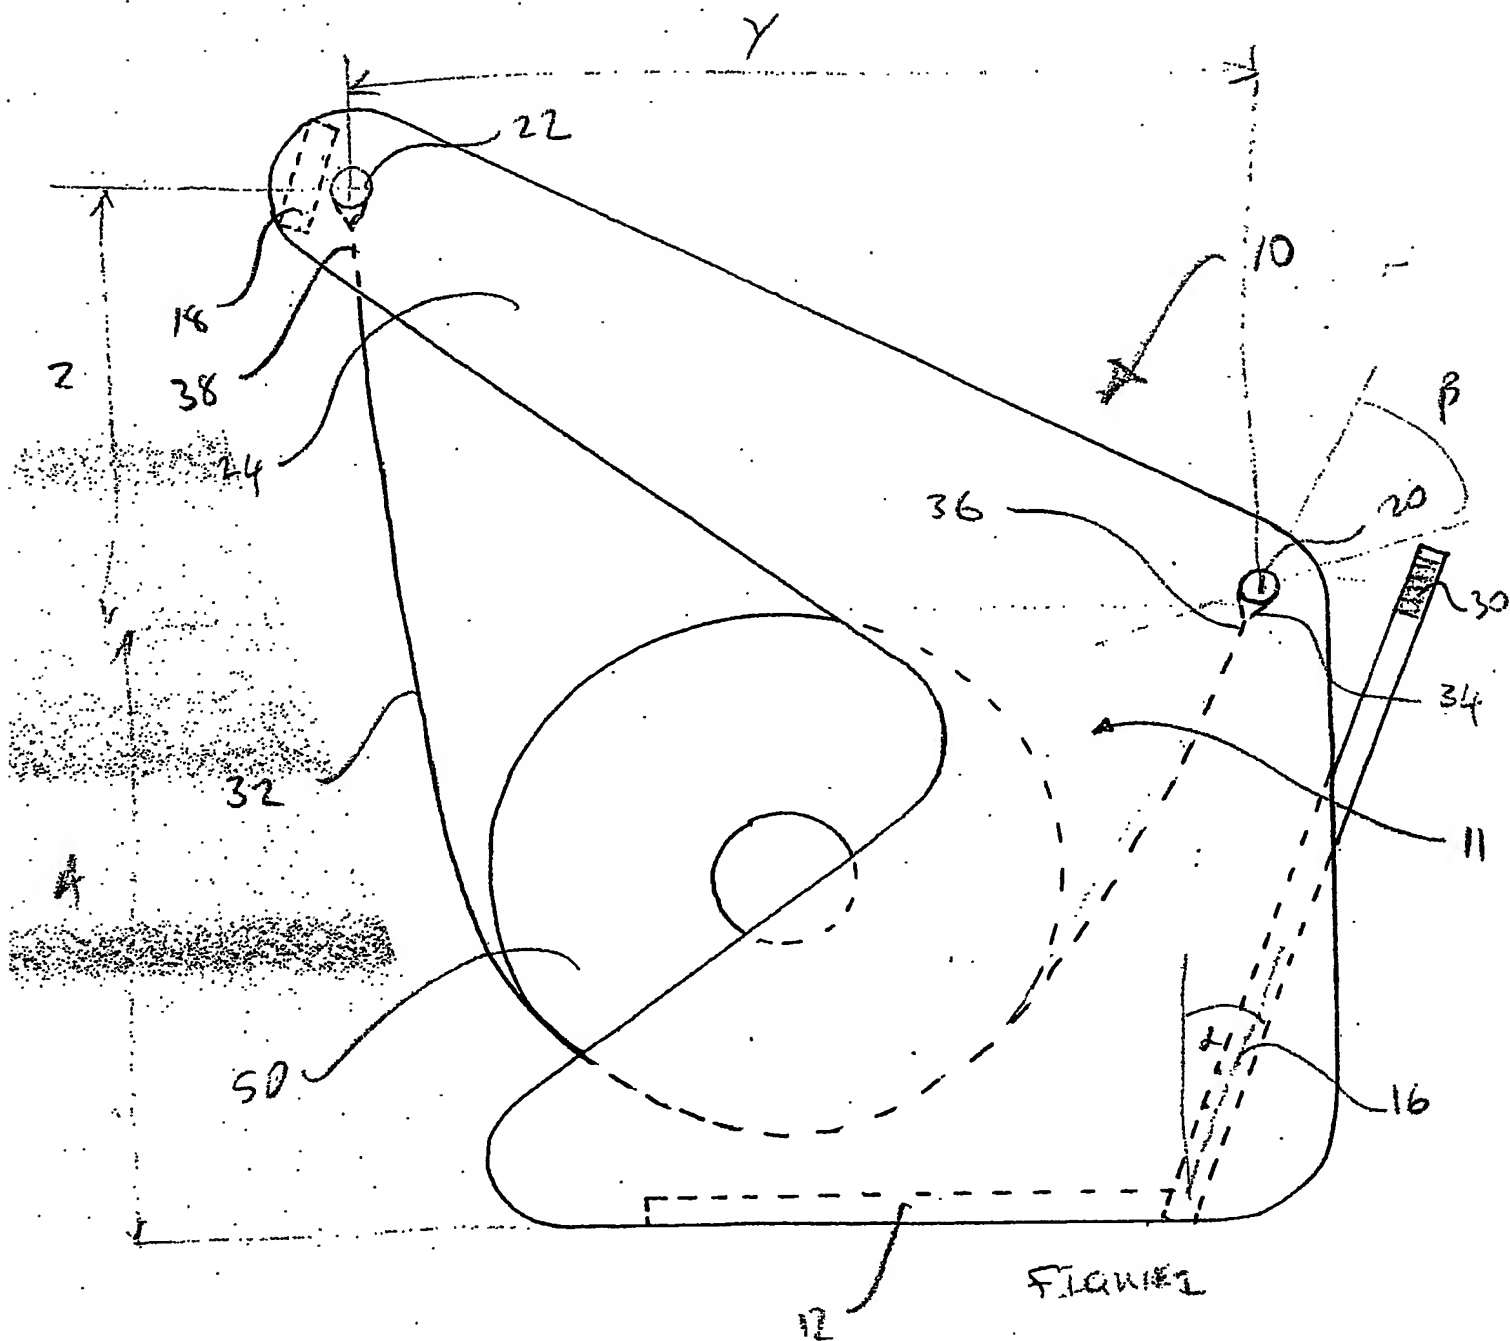


FIGURE 1

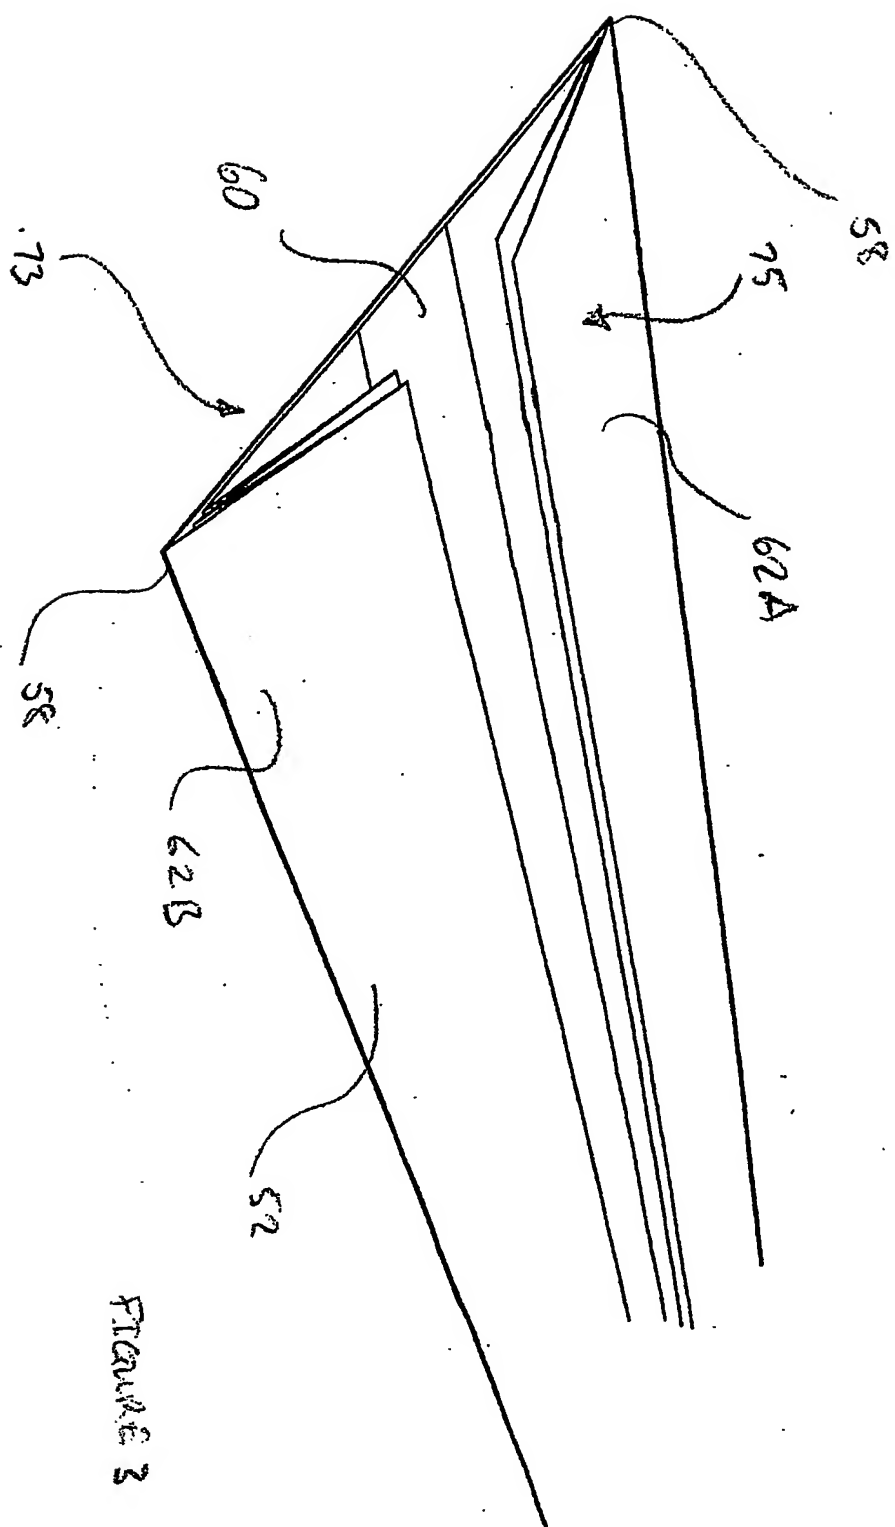


FIGURE 3



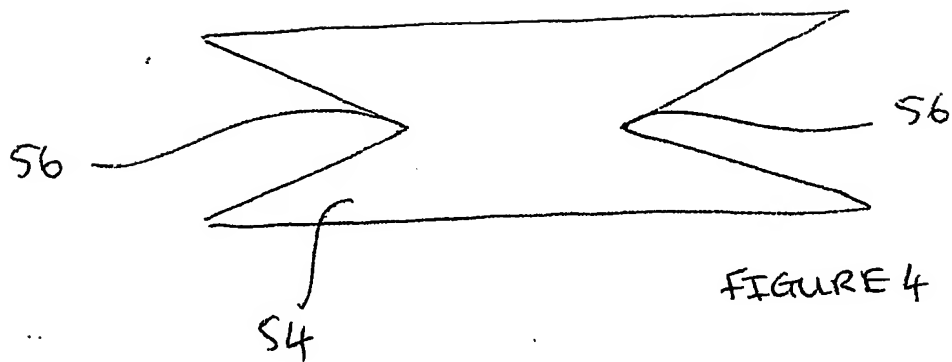


FIGURE 4

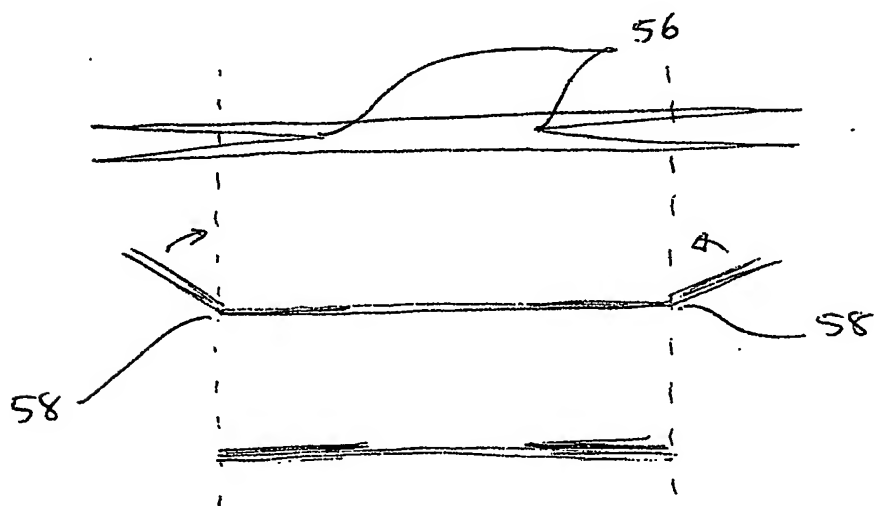


FIGURE 5

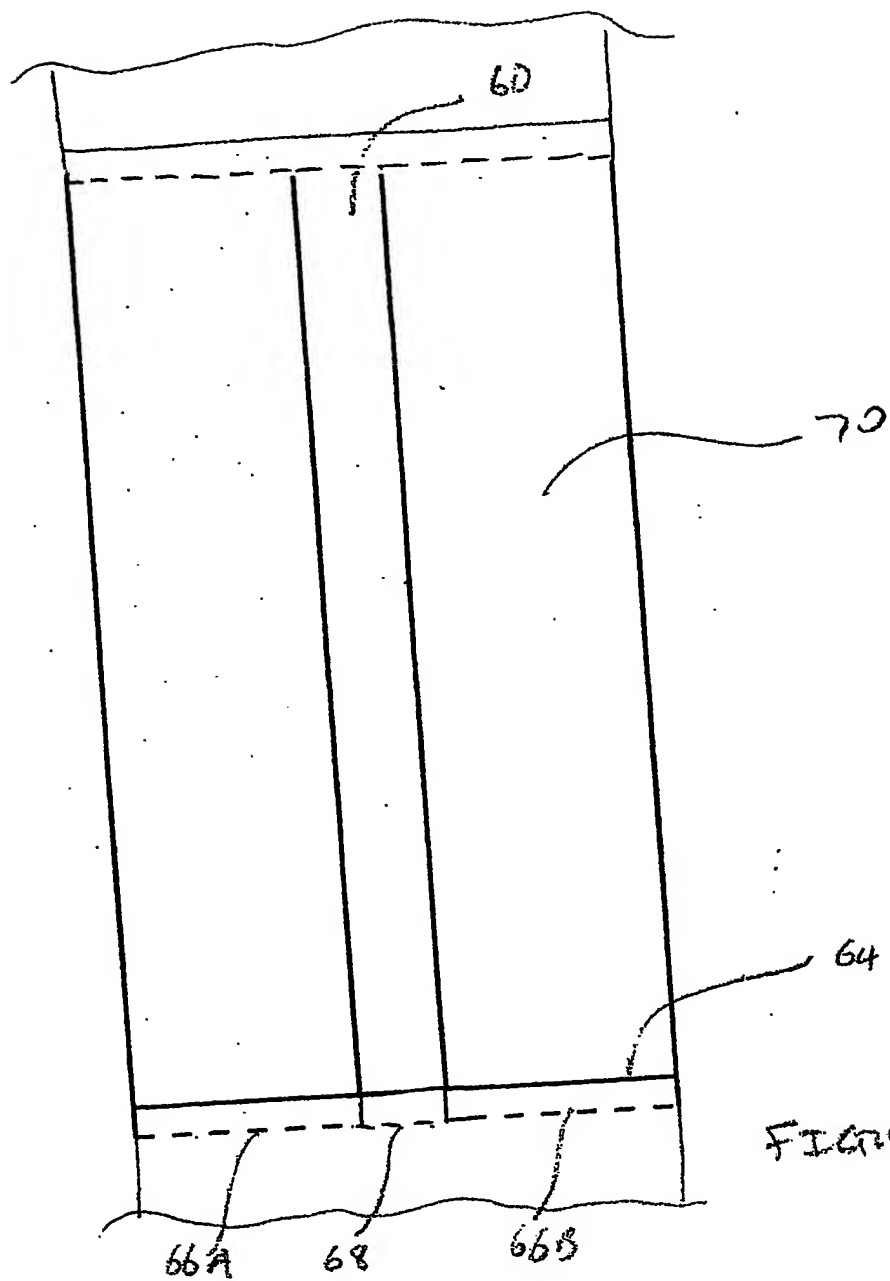


FIGURE 6

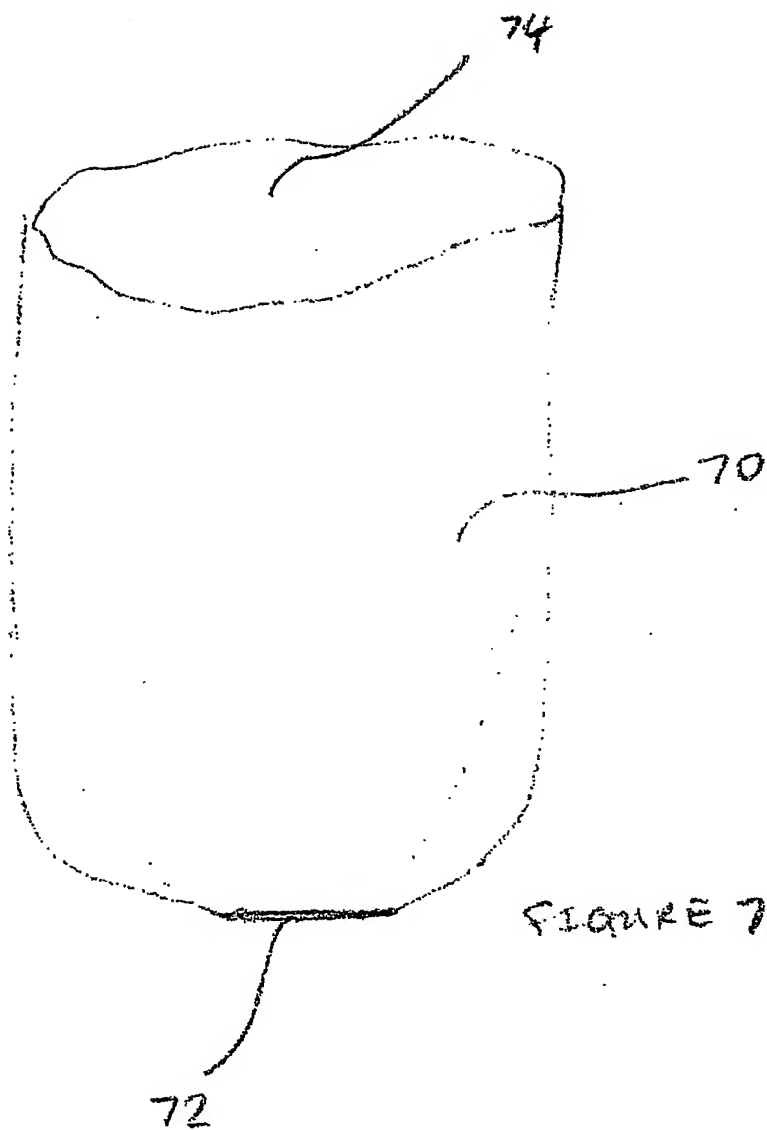


FIGURE 7

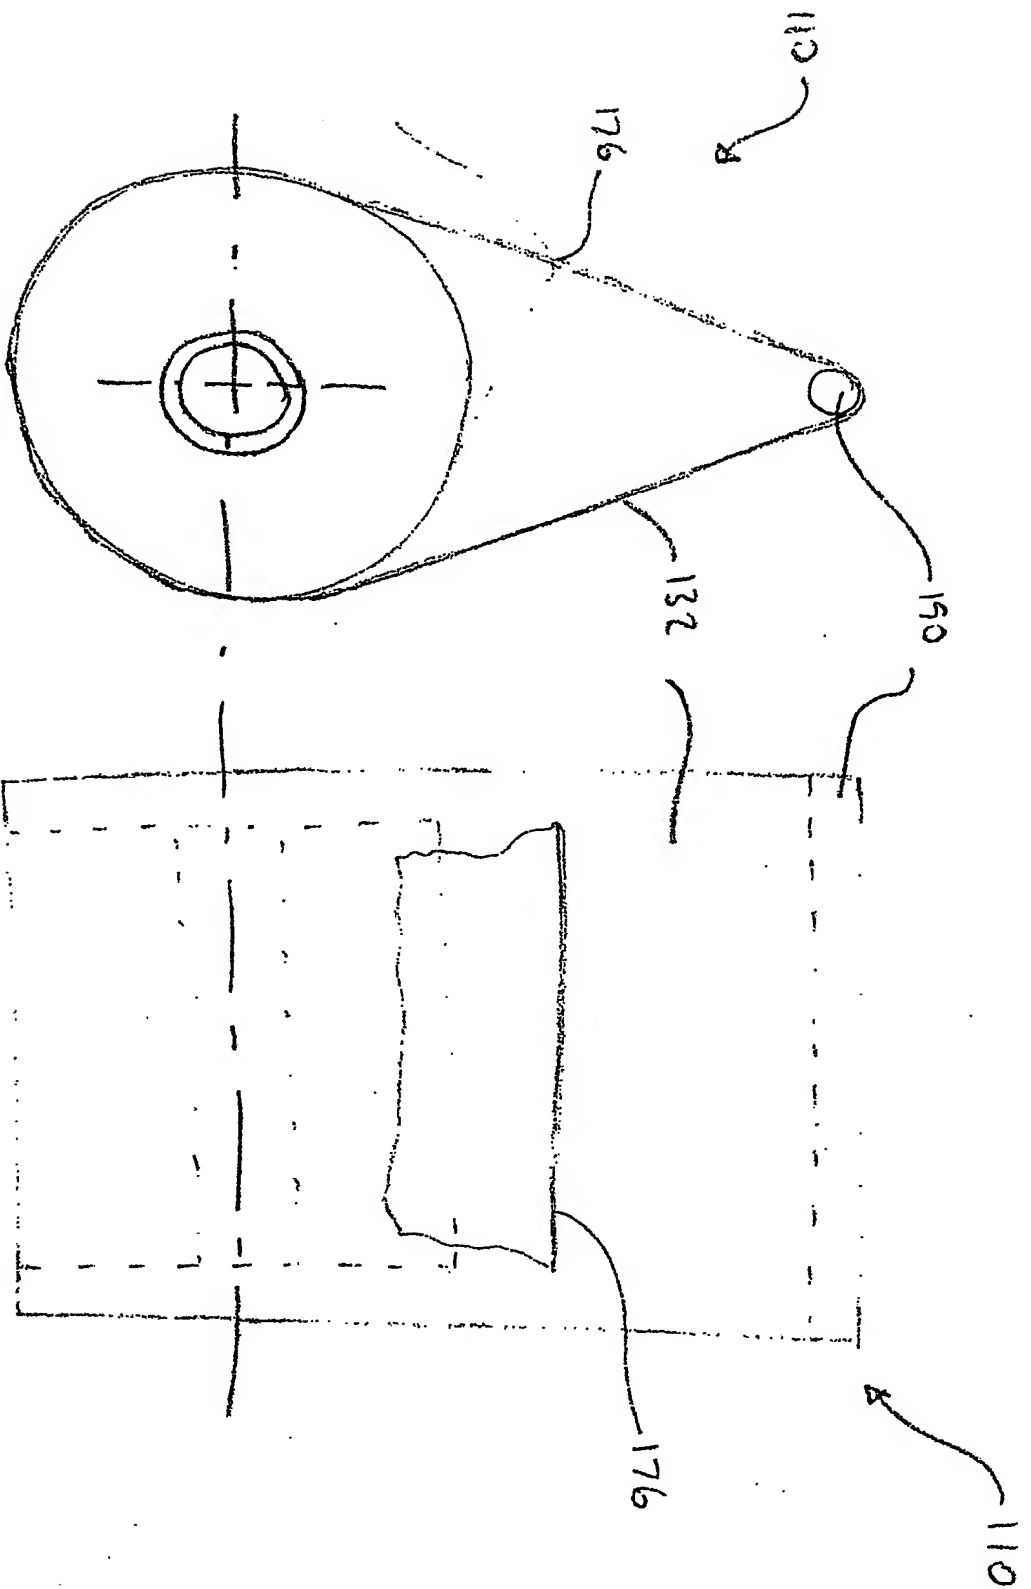


FIGURE 6

FIGURE 7

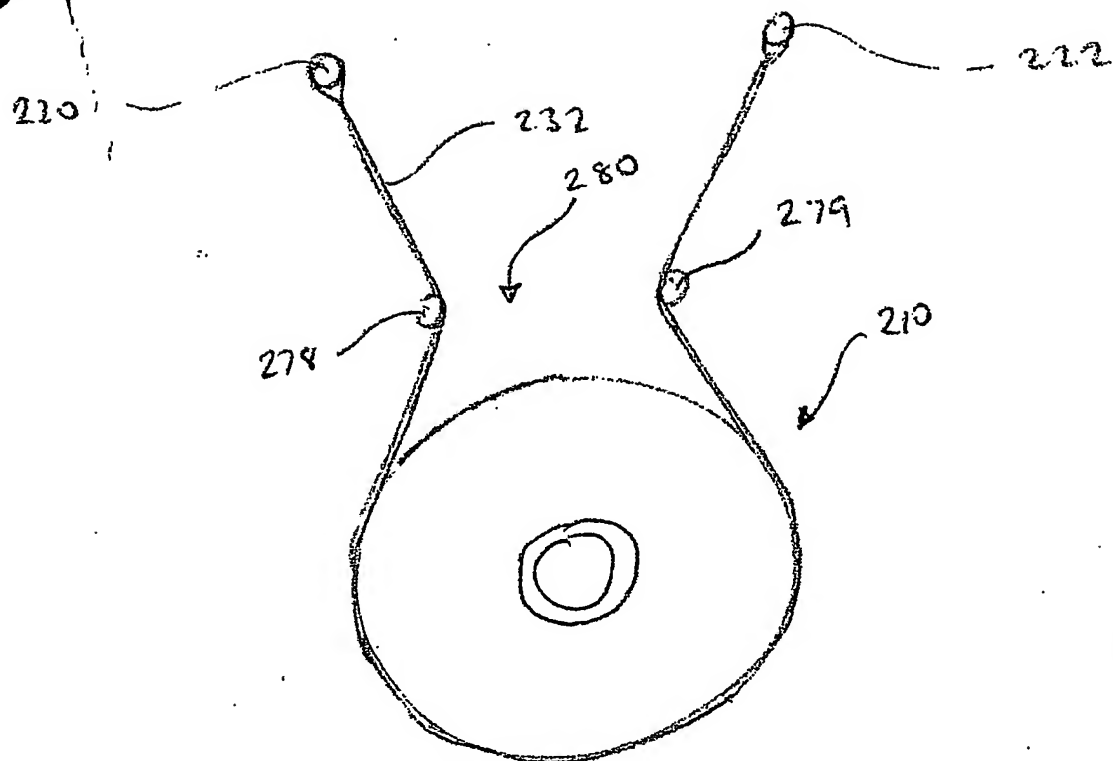


FIGURE 10

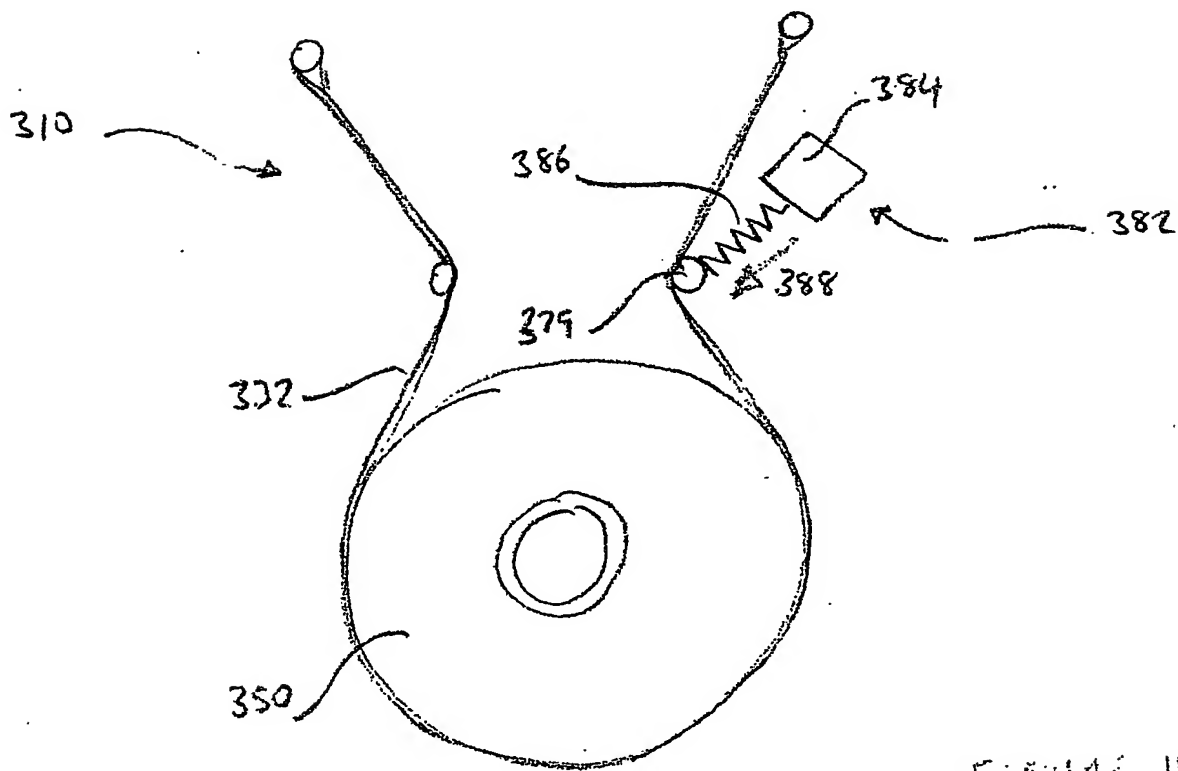


FIGURE 11